



# 57 METER RZ-FOLD

5 SECTION

BOOM PUMP



JJRZ 57-5.18\*

## BOOM SPECIFICATIONS

Vertical Reach	56.5 m (185'4")
Horizontal Reach	52.5 m (172'3")
Reach from Front - Cabover	50.0 m (164'1")
Unfolding Height	11.6 m (38'1")
1st Section Length	11.6 m (38'1")
2nd Section Length	9.9 m (32'6")
3rd Section Length	10.7 m (35'1")
4th Section Length	10.8 m (35'5")
5th Section Length	8.8 m (28'10")
Outrigger	Swing-Style
Front Spread	11.7 m (38'5")
Rear Spread	12.5 m (41')

## GENERAL SPECIFICATIONS

Pipe Size (ID)	125 mm (5")
Boom Control Valve	Proportional (by HAWE)
Radio Remote:	Dual Wireless Transmitter System
Vibrator	Standard
Water Pump	Hydraulic Power 20 bar (290 psi)
Water Tank	800 L (211 G)
Wear Parts	Carbide
Popular Upgrades†	LED Boom Light Kit LED Outrigger Lights Heated Water Tank Heated Hydraulic Tank Air-Cuff Twin Wall Pipe 18 or 20 cell Pump Kit Big Mouth S-Tube

†more options available, ask your sales rep for details.

## PUMP SPECIFICATIONS

Output	Rod Side	181 m <sup>3</sup> /h (235 yd <sup>3</sup> /h)
	Piston Side	122 m <sup>3</sup> /h (159 yd <sup>3</sup> /h)
Pressure	Rod Side	85 bar (1233 psi)
	Piston Side	130 <sup>+</sup> bar (1886 psi)
Concrete Cylinder Diameter	230 mm (9")	
Concrete Cylinder Type	Hard Chromed	
Stroke Length	2100 mm (83")	
S-Tube Size	8" X 7"	
Main Oil Pump	Rexroth Hydromatic A11VSO260	
Hydraulic System Pressure	350 bar (5076 psi)	
Lube System (Hopper)	Automatic	
Switching System	Hydraulic	
Hopper Capacity	Easy Clean 600 L (158 G)	
Number of Strokes/Min	34	
Output Control Range	10(13)~181m <sup>3</sup> /h(235yd <sup>3</sup> /h)	

\*Not to be used through boom pipe.

\*Contact your sales representative for alternate chassis options.


[www.allianceconcretepumps.com](http://www.allianceconcretepumps.com)

# JJRZ 57-5.18

## BOOM PUMP

 1.888.584.7231 
  1.888.870.0908

Reach from front : 50.0m (164'1")

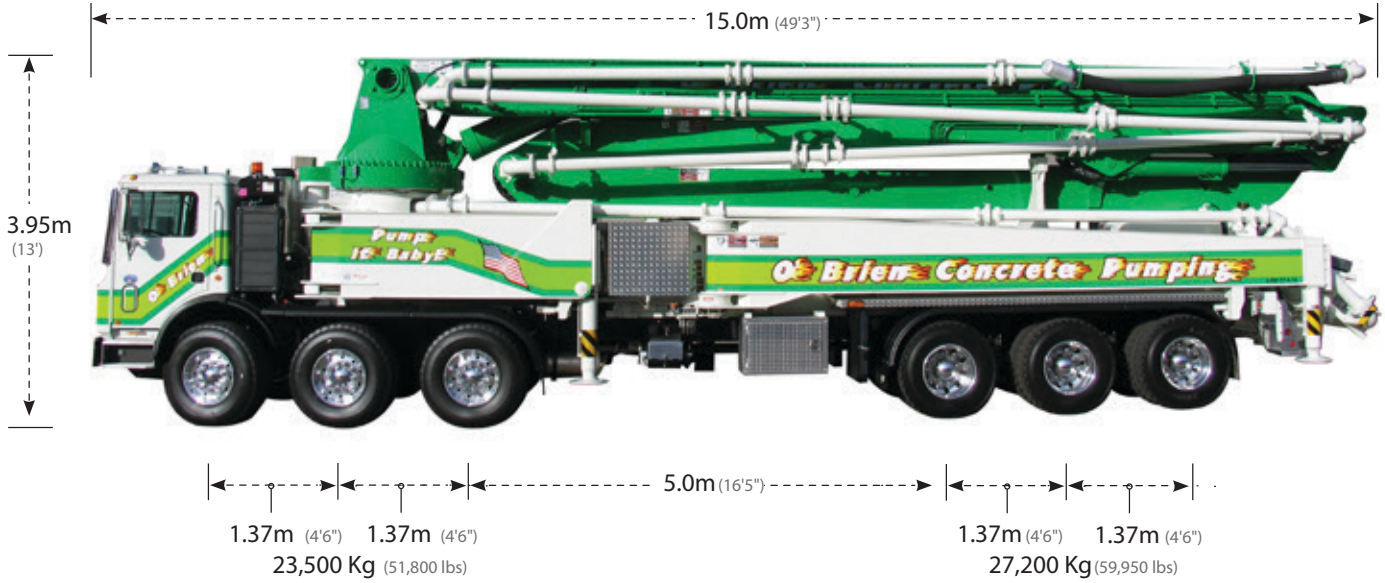

### DIAGRAMS

